



Simple elegance, an impressive fire presentation and cozy circulated heat help make this unique, compact fireplace insert an ideal solution for smaller spaces.

**LENNOX**

HEARTH PRODUCTS  
*Innovation never felt so good.™*


**MERIT™** SERIES

The Medina™ direct-vent gas insert is the perfect combination of elegance and convenience. The small size of the Medina makes it one of the most versatile fireplace inserts available—fitting into most small zero-clearance factory-built and masonry fireplaces. The Medina provides a generous viewing area and realistic fire that you would expect from a much larger unit. And with 25,000 BTUs, standard 155-CFM variable-speed blower and high-efficiency operation, the Medina is sure to bring warmth and beauty to any home.



**Medina™** shown with black nickel inset in black Arch face. Cover image shown with black Traditional face

## INSET DESIGNS

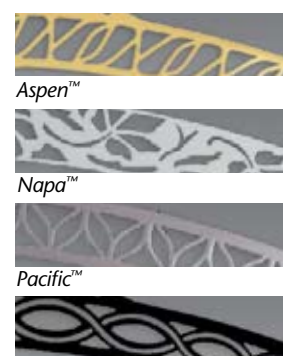

Tuscan™

## AVAILABLE FINISHES



Inset designs for Arch face only and available finishes

## STANDARD FEATURES

Small size fits into most zero-clearance fireplace openings

Heavy, 14-gauge aluminized steel firebox construction

Operates without power—still heats during a power outage

Standard 155-CFM variable-speed blower delivers warm, consistent heat

84% steady-state efficiency

## REQUIRED OPTIONS


Available with black Traditional face or black Arch face, 39"W x 27"H surround—with inset options, and black surround trim

## OPTIONAL ACCESSORIES

Wireless remote control thermostat or wall thermostat



## UNIT DIMENSIONS

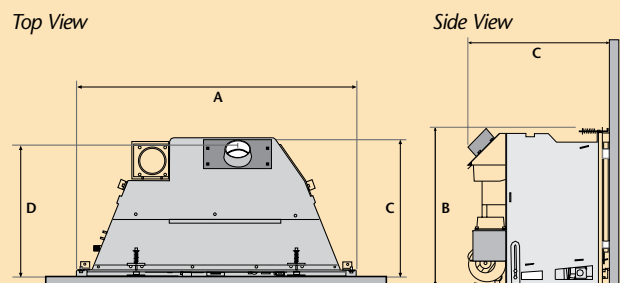

<b>A</b>	<b>FRONT WIDTH</b>	31-1/4"
<b>B</b>	<b>OVERALL UNIT HEIGHT*</b>	17-1/4"
<b>C</b>	<b>UNIT DEPTH</b>	15-3/4"
<b>D</b>	<b>DEPTH TO CENTERLINE OF 3" FLUE STARTER COLLAR</b>	13-3/4"


\*Without hood. Same as rear height to top of the flue collar.

## SPECIFICATIONS

<b>HEATING CAPACITY*</b>		500–1,200 sq. ft.
<b>BTU INPUT—HIGH</b>		25,000 NG & LP
<b>BTU INPUT—LOW</b>		17,500 NG 18, 500 LP
<b>COLINEAR 3" FLEX VENT</b>		Security Chimneys™ and other
<b>BLOWER (INCLUDED)</b>		155-CFM Variable-Speed
<b>CANADIAN ENERGUE GUIDE RATING</b>		NG—63.95% LP—67.2%
<b>STEADY-STATE EFFICIENCY**</b>		84% Natural Gas & Propane

\*Square-feet heating capacities are approximations only.  
\*\*Efficiency varies slightly with various pipe configurations.

## MINIMUM CLEARANCE TO COMBUSTIBLES

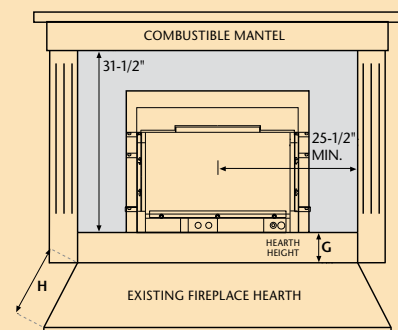

### REQUIRED MINIMUM FIREPLACE OPENINGS

<b>FRONT WIDTH</b>	31-1/2"
<b>HEIGHT</b>	17-1/2"
<b>REAR WIDTH</b>	19"
<b>DEPTH</b>	16"

## HEARTH PROTECTION

<b>HEARTH HEIGHT</b>	G =	0"	2"	4"
<b>HEARTH EXTENSION</b>	H =	13"	10"	0"

Note: Hearth protection to be min. 3/8" thick non-combustible.

## SIZING FOR INSERT SURROUND

The Medina Traditional and Arch face kits both come standard with a 39"W x 27"H surround and black surround trim.

These specifications are for reference only and shall not be used for actual installation. Use installation instructions for actual installation.

## PRODUCTS YOU CAN COUNT ON


Lennox is committed to providing you with high-quality products. A qualified dealer can help you find the right product to give you years of comfort and enjoyment.



**HEARTH PRODUCTS**  
*Innovation never felt so good.™*

© Lennox Industries Inc. 2008

Visit us at [www.lennox.com](http://www.lennox.com), or contact us at 1-800-9-LENNOX.



Look for the **EnergyGuide** Gas Fireplace Energy Efficiency Rating in this brochure

Based on CSA P.4.1-02

### IMPORTANT NOTES:

As with any heating appliance, fireplace or stove, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Local conditions, such as elevation, wind, vent configuration and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

Diagrams, illustrations and photographs are not to scale—consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

Approved to U.S. and Canadian safety and performance standards—ANSI Z21.88/CSA 2.33-M98 vented gas fireplace heaters.

